



KLEAN BUFFER Wheel Guards

Designed for removal of dust and other particulate during finishing processes

Ph: (800) 233-6530 or at keainfo@keaworks


www.kea.works




KEA's KLEAN BUFFER Safety Wheel Guards are for dust collection and containment of buffer wheels up to 16" diameter to help reduce air contaminants and cleanup time

Make your buffing operations safer, cleaner, and ergonomic by enclosing open wheels and collecting the dust particulate into a dust collector. Your bench buffer will operate safely by entrapping the polishing wheel's particulate into the hood and exhausting it out the back round outlet. The hood covers more than half the wheel and can be tilted front-to-back by adjusting the mounting on each of the side's brackets.

Outside cover can be easily removed to facilitate changing buffer wheel.

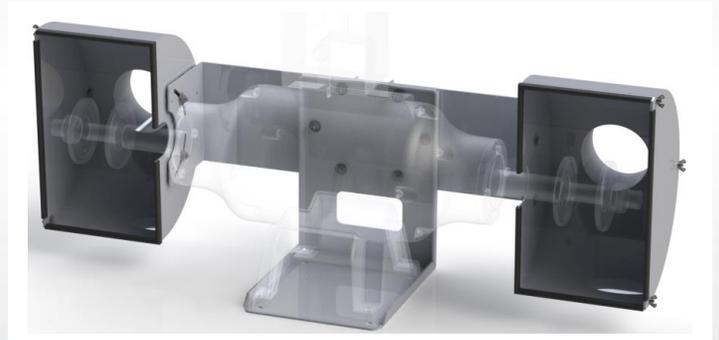

"Ghost view" to left is our large buffer with *KLEAN BUFFER* Wheel Guards, Mounting Plate and Brackets installed. Some assembly required: buffer hood mounting plate is positioned between pedestal base and buffer.

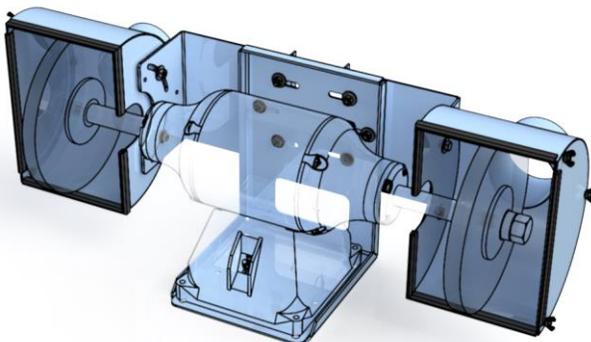

- **Construction:** The KLEAN BUFFER wheel guard hood is fabricated in the USA of 14-gauge mild steel. The KLEAN BUFFER base and mount brackets are fabricated of 10-gauge steel. All components are powder coated ASA 61 gray (same color of electrical boxes).

KLEAN BUFFER System Configurations: For Baldor Buffers

KEA's KLEAN BUFFER System includes a pair of wheel guards, a mounting plate, and two mounting brackets. See below for specific buffer models:

For Baldor Models 111 or 114 use the below:

- #2608S for up to an 8" diameter wheel

For Baldor Models 330-B, 332-B, 333-B, 334-B, 407-B, 409-B, 410-B, or 412-B use one of the below:

- #2608 for up to an 8" diameter wheel
- #2610 for up to a 10" diameter wheel
- #2612M for up to a 12" diameter wheel
- #2614M for up to a 14" diameter wheel

For Baldor Models 1250, 1251, 1252, 1253, 1453, 1454, 1456, 1457, or 1458 use one of the below:

- #2612 for up to a 12" diameter wheel
- #2614 for up to a 14" diameter wheel
- #2616 for up to a 16" diameter wheel

Other Accessories and Options

Flex hose kits, fittings and ducting available to connect to a dust collector.

KEA Pedestals with two shelves and openings to pass through electrical cord:

- #7365 for Baldor models 330-B, 332-B, 333-B, 334-B, 407-B, 409-B, 410-B, or 412-B (comparable to GA16)
- #7366 for Baldor models 1250, 1251, 1252, 1253, 1453, 1454, 1456, 1457, or 1458 (comparable to GA20)

KEA Dust Collector Systems to connect with above KLEAN BUFFER components:

- 2200 Series Buffer/Grinder Dust Collector
- 2000 Series Drum Dust Collector
- 2900 Series CyKLEAN Dust Collector

Use a KEA dedicated dust collector to effectively collect the dust particulate at the source

For Other Buffer Manufacturers Use Below Table to Size Your Buffer Wheel Guard Hood

KEA Model #	Buffer Guard/Hood Dimensions				Mount Dimensions	
	Diameter	Width	Outlet Diameter	Outlet Length	Centerline Height	Width between Hood Centers
2608S	9"	5 13/16"	4"	2 1/2"	5 7/16"	15" +/- 11/16"
2608	9"	5 13/16"	4"	2 1/2"	8 3/16"	22 15/16" +/- 1 3/8"
2610	11"	7 15/32"	4"	3"	8 3/16"	22 15/16" +/- 1 3/8"
2612M	13"	8 1/2"	4"	3"	8 3/16"	22 15/16" +/- 1 3/8"
2612	13"	8 1/2"	4"	3"	9 9/16"	35 3/4"
2614	15"	9"	6"	3"	9 9/16"	35 3/4"
2614M	15"	9"	6"	3"	9 9/16"	35 3/4"
2616	17"	9"	6"	3"	9 9/16"	35 3/4"



Ph: (800) 233-6530
keainfo@kea.works
www.kea.works

SINGLE SOURCE FOR
Fume / Welding / Dust Arms
Ambient Air Cleaners, Mobile Welding Units
Dust Collectors, Vehicle Exhaust, etc.

Dealer Contact: